

Project Name:		Approval:	
Location:		Date:	
Engineer:		Construction:	
Submitted to:		Unit #:	
Submitted by:		Drawing #:	
Reference:			

MODEL COMPATIBILITY:

Compatible with Single-Zone and Multi-Zone indoor unit models: CDXS, CTXS, FDXS, FTK_N, FTK_A, FTX_N, FTX_A, FTX_U, FTXG*, FTXR, FTXS, FVXS

*The Sarara drying function of the *QUATERNITY* units is not supported with the BRC944.

The following indoor units do not have the S21 connection and require an additional interface adaptor (ordered separately) to provide the S21 connector for the One+ communication:

Indoor Unit Models	Required Interface Adaptor
FTX09NMVJU, FTX12NMVJU, FTK09NMVJU, FTK12NMVJU	KRP067A41E
FTX15NMVJU, FTX18NMVJU, FTX24NMVJU, FTK18NMVJU, FTK24NMVJU	KRP980B2E

SPECIFICATIONS:

Model	BRC944B2-A08
Description	Wired Remote Controller Kit
Maximum Indoor Units	1
Dimensions	4.75 in x 4.75 in x 0.69 in (120mm x 120mm x 17.5 mm)
Communication Protocol	S21
Comfort Setpoint Range	64°F – 90°F Set Point Range
Operation	Start / Stop
	Mode (Auto/Heat/Cool/Dry)
	Set Temperature Setpoint
	Fan Speed
	Airflow Direction
Scheduling	One-time Timer
	Daily Timer

PRODUCT IMAGE:



FEATURES:

- An additional wiring cable is required to use together with the Wired Remote Controller Kit. Select one of the following cables:
 - BRCW901A03: Non-plenum rated, 10ft
 - BRCW901A08: Non-plenum rated, 26ft
 - DACA-BRCW901P10: Plenum rated, 10ft
 - DACA-BRCW901P25: Plenum rated, 25ft

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056

www.daikinac.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)



Submittal Data Sheet

BRC944B2-A08 – Wired Remote Controller Kit

Project Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____

Approval: _____

Date: _____


Construction: _____

Unit #: _____

Drawing #: _____

- Selectable auto / cool / heat / dry operation modes with adjustable setpoint and fan speed
- Set temperature setpoint in °F or °C units with 1 degree increments
- Temperature is controlled through indoor unit temperature sensor
- Built in one time or daily timer functionality with up to 2 timer actions per day
- Approximately two-hour battery backup
- Can be used together with the factory supplied standard wireless remote controller

DIMENSIONS:

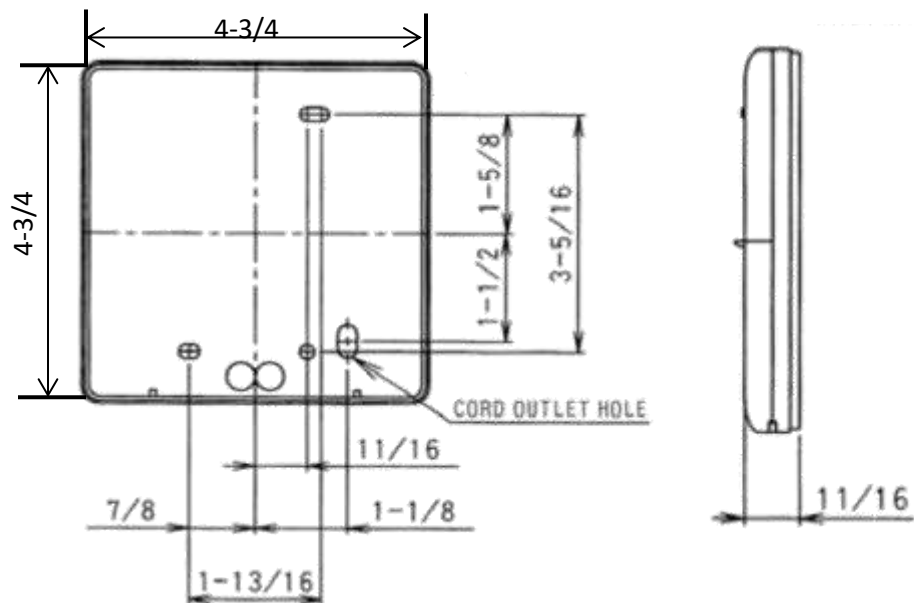

DOCUMENTATION:

Documentation available on www.daikinac.com and/or www.daikincity.com:

- Submittal
- Installation Manual
- Operation Manual

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston TX, 77056

www.daikinac.com www.daikincity.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)